



NUMBER OF DOORS



INLAY DOOR SYSTEM




MAX. DOOR WEIGHT



DOOR THICKNESS



DOOR WIDTH



DOOR / TRACK GAP



FITTINGS WARRANTY



FEATURES

Variable closing speeds

Can be used with stopper
Door width 750 - 1250 mm

For interior as well as exterior use

Max. door height 2500 mm

Adjustable zero position $\pm 4^\circ$

Glass thickness tempered glass
10 -15 mm

Adjustable closing speed $150^\circ - 10^\circ$

$/ 10^\circ - 0^\circ$

Ambient temperature $-20^\circ - +50^\circ\text{C}$


**Borrow light from any room
with easy to install Project
Frameless Glass Doors**

Applications

**Residential
Commercial**

**Single or Double Doors
Available with fixed side panels
Can be incorporated into a
partition.**

Project Hinge HD

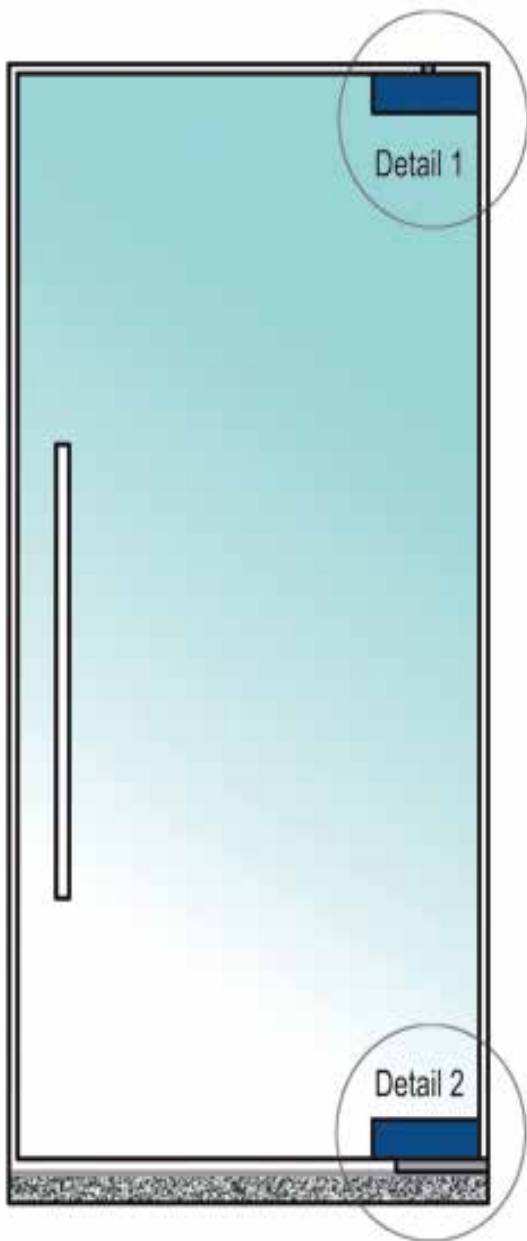

1 x BO 5214265



1 x BO 5214306








1 x BO 5214287



The entire technology of the Self-closing Patch Fitting is itself housed in a subtly designed fitting. A floor recess is therefore not required in contrast to conventional floor-mounted door closers. It is assembled by simply screwing the base plate onto the existing surface. Bohle's self closing patch fitting has been tested to European standards for long durability and excellent functionality in accordance with DIN EN 1154. tested as per DIN 1154 with 500,000 cycles

Glass Options

-  Clear
-  Low Iron
-  Obscure Sandblasted
-  Project Design (28 designs)
-  Tinted

Glass options include Clear, Ultra Clear, Obscure Sandblasted, Project Design and Tinted.

Finishes include Polished, Brushed Satin and Black